PENTAIR

20-70 M³

PANTERA

SINGLE SPEED PUMPS

Simplicity and efficiency for in-ground and above-ground pools.




For more information on your product !

SCAN ME

ELIGIBLE FOR PIPPOINTS

3 years WARRANTY

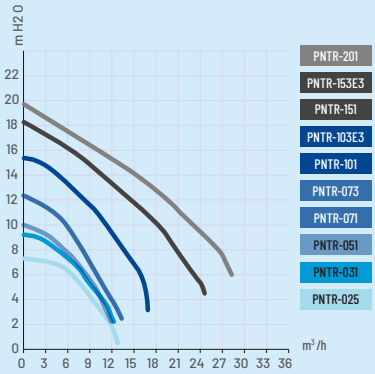

FEATURES


BENEFITS

FEATURES		BENEFITS
Quick self priming	→	Quick and safe start of the pump
Swivel unions included	→	Fit also with above-ground pools and easy assembly
Long cable included	→	Easier installation and direct plugging into power socket

TECHNICAL FEATURES

- 100% Made by Pentair in our Pisa, Italy plant
- Induction asynchronous motor
- Shaft: Stainless steel AISI 416
- SKF sealed bearings
- IP-X5
- Thermal protection (single phase), IE2 compliant (tri-phase <0.75kW), IE3 compliant (tri-phase >0.75kW)
- Shaft Sleeve - A nylon shaft sleeve incorporating a flinger adds additional water ingress protection
- Inlet/Outlet → 50 mm
- Ø Unions → 50 mm ID.
- Unions included → Yes
- Salt resistance → Yes

Part Number	Flow	Power output		Volt	Phase	Width	Length	Weight	List Price
	m³/h @ 8 m	(kW)	(HP)	(V)		(mm)	(A) (mm)	(Kg)	(€ VAT excl)
PNTR-025	4	0.18	0.25	220-240	1~	177	565	8.3	On demand
PNTR-031	6	0.25	0.375	220-240	1~	177	565	8.4	On demand
PNTR-051	7	0.375	0.5	220-240	1~	177	565	8.6	On demand
PNTR-071	9	0.5	0.75	220-240	1~	177	565	9	On demand
PNTR-073	9	0.5	0.75	380-420	3~	177	565	9	On demand
PNTR-101	13	0.75	1	220-240	1~	177	590	11.2	On demand
PNTR-103E3	13	0.75	1	380-420	3~	177	590	11.2	On demand
PNTR-151	20	1.13	1.5	220-240	1~	177	610	13	On demand
PNTR-153E3	20	1.13	1.5	380-420	3~	177	610	13	On demand
PNTR-201	24	1.5	2	220-240	1~	177	610	14.5	On demand
PNTR-203E3	24	1.5	2	380-420	3~	177	610	14.5	On demand

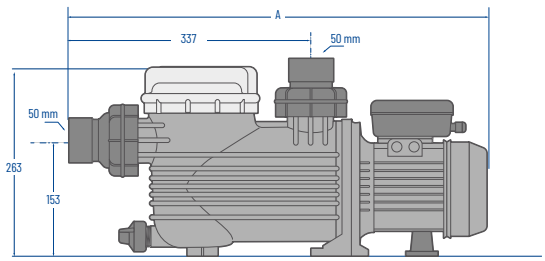

Packaging	Length (cm)	Width (cm)	Height (cm)	Pce/Palet
Box	570 (up to PNTR-073) 610 (from PNTR-101)	200	320	-
Palet	80	120	150	24

All indicated Pentair trademarks and logos are property of Pentair. Third party registered and unregistered trademarks and logos are the property of their respective owners. © 2022 Pentair. All rights reserved.