PENTAIR

VARIABLE SPEED PUMPS

30-80 M³



SUPERFLO VS2

SUPERFLO pumps offer the best price quality ratio.

TRADE GRADE | ELIGIBLE FOR PIPPOINTS | 3 years WARRANTY + 1 years TRADEGRADE

FEATURES


- XL Strainer basket
- ¼ turn opening lid
- Quick self priming
- One-piece pump body
- Oversized and robust motor


BENEFITS

- → Longer periods between cleanings
- → Easy opening and locking
- → Quick and safe start of the pump
- → Super silent
- → Extremely reliable and efficient pump

TECHNICAL FEATURES

Salt resistance	→	0.40% (4 g/l)
Inlet/Outlet	→	1.5" BSPP
	→	50mm unions included
Technical Specification	→	Oversized 2.7hp asynchronous motor derated to 1.5hp to deliver high efficiency even at high speed
	→	3 programmable speed/time + override
	→	Simple and intuitive LCD display with Watts, RPM & time info
	→	4 digital inputs for external control (optional communication cable - PN. R356324Z)



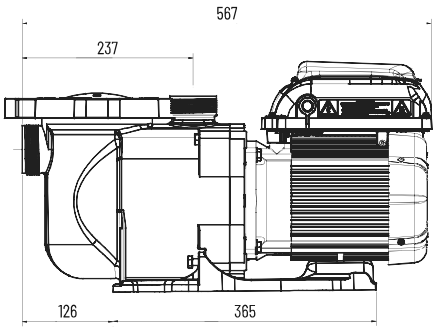


PACKAGING


	Length (cm)	Width (cm)	Height (cm)	Boxes per pallet
Box	65	33	41	-
Palet	120	100	160	18

PERFORMANCE

For more information on your product !

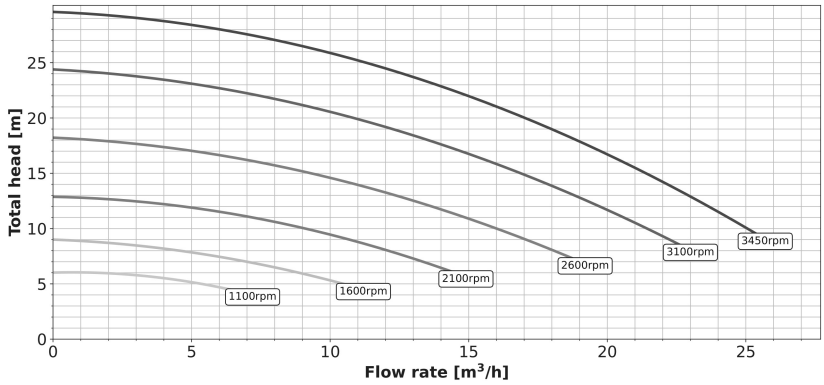

POWER CONSUMPTION

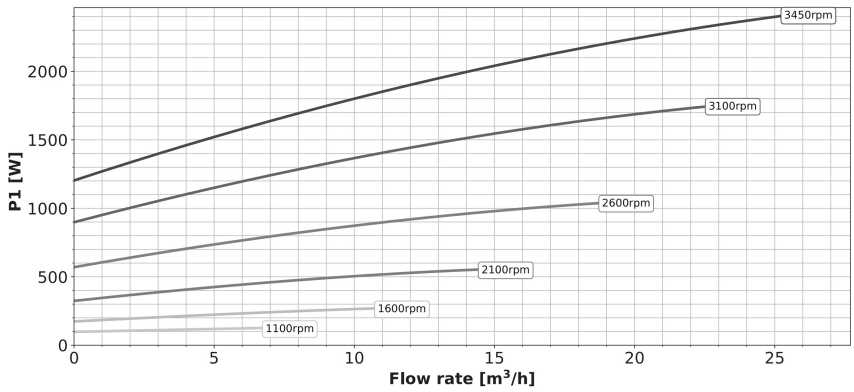

ORDERING INFORMATION

Part number	Type (kW/HP)	Flow @8m (m³/h)	Power input (V)	Full load (A)	Efficiency*	P1* (W)	Length dim A (mm)
SFL-VS2	1.1 / 1.5	26	1~230	10.6	A	2254.00	605

*as defined by EN 17645